AIR IS LIFE

AIR IS COMFORT

AIR IS ENERGY

QUALITY AIR FOR LIFE

Authorised Dealer

- $\,\blacksquare\,$ Please read the Installation Instructions carefully before installing the unit, and the Operating Instructions before using it.
- Specifications are subject to change without prior notice.
- The contents of this catalogue are accurate as of October 2020.
- Due to printing considerations, the actual colours may vary slightly
- All graphics are provided merely for the purpose of illustrating a point.




Do not add or replace refrigerant other than the specified type. Manufacturer is not responsible for the damage and deterioration in safety due to usage of other refrigerant.

20RAC1101Z

Panasonic Australia Pty. Limited

1 Innovation Road, Macquarie Park, NSW 2113 ACN 001 592 187 ABN 83 001 592 187 Website: aircon.panasonic.com.au



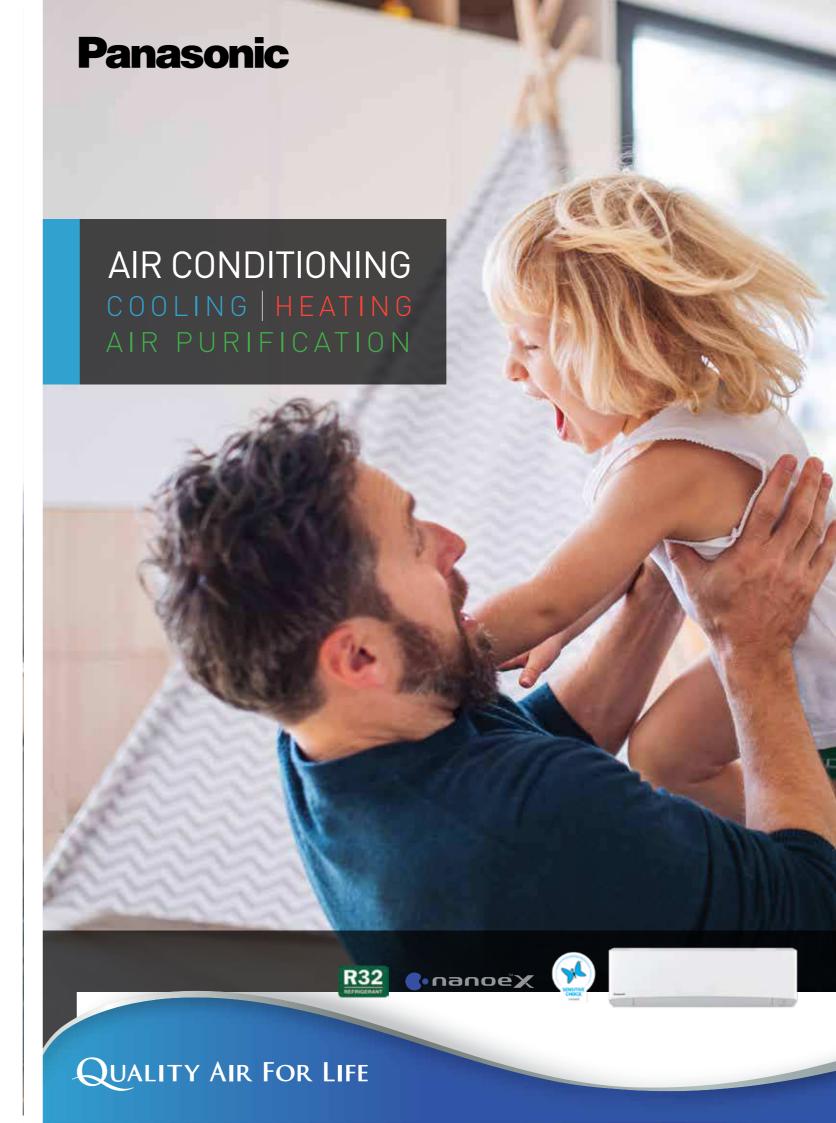



CLASS LEADING FEATURES



QUALITY AIR FOR LIFE

The Panasonic nanoe™ X utilises next gen technology to remove dust, inhibit the growth of bacteria, mould and viruses, and deodorise, ensuring quality air, for life.

Please refer to pages 6 and 7 for more details.





MARKET LEADING CONNECTIVITY

Control your air in more ways with Panasonic air conditioning's market leading connectivity; now Google Assistant & Amazon Alexa compatible*.

Refer to page 5 for terms and conditions.

* Google is a trademark of Google LLC.

Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates.



24 HOURS AIR PURIFICATION

Purify your air 24 hours a day at only 35W/Hour. *Whether you're at home or away, nanoe™ X leaves you with cleaner and more comfortable spaces.

*The nanoe™X mode can be run independently from cooling or heating mode, and needs to be on for the 24 hour air purification to function



AEROWINGS





CONTROL, COMFORT, REASSURANCE

Featuring leading technologies that provide shower/fast cooling, quiet operation and energy efficiency; your control, comfort, and reassurance are accounted for.


3

AWARENESS OF INDOOR AIR QUALITY

Clean air is essential to fostering and maintaining a healthy lifestyle; though there is little awareness of the invisible issues with IAQ. Australians spend 90% or more of their time indoors. Increasingly, as our homes and living/working spaces have become better sealed from the external environment, pollutants from indoor sources (e.g. gas cookers, heaters, wood fires, mould, pollen etc.) are being found at higher concentrations. Panasonic works to improve your IAQ by removing/reducing those invisible issues, bringing you peace of mind in the quality of your air.

*According to the Australian Government, Department of Environment & Energy (2019) https://www.environment.gov.au/protection/air-quality/indoor-air

Invisible issues with indoor air environments

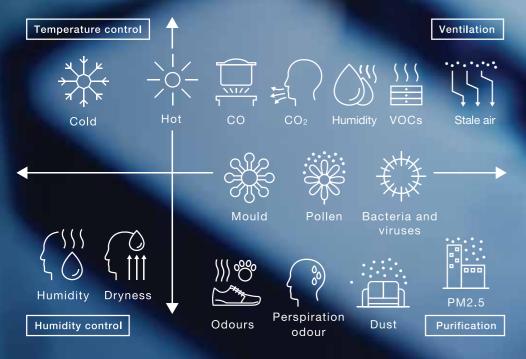


PM2.5: refers to atmospheric particulate matter (PM) that have a diameter of less than 2.5 micrometers (approximately 3% the diameter of a human hair). Due to their size, fine particles tend to stay longer in the air than heavier particles; this increases the chance of inhalation. These particles are able to bypass the nose and throat and penetrate deep into the lungs and some may even enter the circulatory system, having an adverse effect on ones health. https://www.health.nsw.gov.au/environment/air/Pages/particulate-matter.aspx.

LIVING ROOM & BFDROOM

Hot air tends to stagnate in closed spaces. Consequently, indoor temperatures and humidity increase. Conditions also worsen the more people there are within the room.

Clean, quality air within the bedroom is important as the bedroom is where we spend a majority of our time at home. The average Australian spends 8 hours or more here.

Pollutants are present at higher concentrations towards the floor. As such, children are at a higher risk of constant contact.

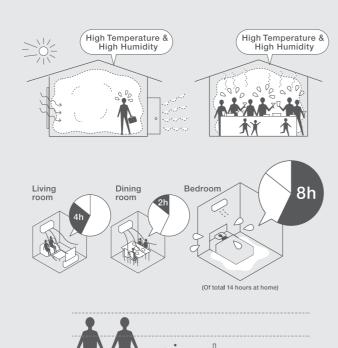

A SMARTER WAY TO CONTROL YOUR AIR



The Panasonic Comfort Cloud App & WLAN Smart Adaptor deliver convenient control, connectivity and comfort. Seamlessly adjust temperature, monitor energy consumption, change modes etc. all from just one mobile device.*

Now Google Assistant and Amazon Alexa compatible.*



SMART Control Control, monitor & analyse up to 200 units in multiple locations from just one device.



SMART Comfort Control your comfort 24 hours a day with remote AC access features, air purification functionality and much more.



SMART Efficiency Analyse and compare energy consumption, improving energy efficiency and cost effectiveness.



SMART Assist Monitor & manage air conditioner troubleshooting effortlessly whilst assigning user control permissions.

INTUITIVE VOICE CONTROL

Introducing intuitive voice control with Google Assistant and Amazon Alexa control compatibility*. Using your existing Google assistant or Alexa devices, control your air conditioner with just your voice.

*CZ-TACG1 & updated firmware required.

Compatible Device and Browsers

- 1. iOS 9.0 or above
- 2. Android 4.4 or above



Please note: This is not a definitive list of all compatible devices, othe similiar devices which use supported Operating Systems should also work either via dedicated Apps. Please note that user experience may vary slightly





- * CZ-TACG1 WLAN Adaptor required per unit. Requires an Internet connection and the App downloaded from the App Store or GooglePlay Store on your smartphone or tablet with the latest Operating System
- available. "To use Amazon Alexa to control your air conditioner, you will need an Amazon Echo device.

 *To use Google Assistant to control your air conditioner, you will need an Google Assistant device.

 *Google is a trademark of Google LLC. Amazon, Alexa and all related logos are trademarks of Amazon com Inc. or its affiliates
- Wireless LAN Remote Control for Internet Connection required optional network adaptor.
- * Indoor temperature display and some special function are not available through the App for all models * Indoor image displayed may not match with actual unit.

PANASONIC'S ADVANCED 24 HOUR nanoe™X AIR PURIFICATION SYSTEM*

Panasonic's nanoe™ X Technology is a revolutionary air purification system that keeps your living space fresh and clean for you and your family.



SENSITIVE CHOICE



ASTHMA + RESPIRATORY
FOUNDATION NZ

Sensitive Choice is a community service program that aims to educate people about the importance of managing their asthma and allergies. Developed by the National Asthma Council Australia in 2006, the program also encourages companies to produce produce

Panasonic and Sensitive Choice have partnered to introduce the nanoe™ X to the Austland market. Purifying your air 24 hours, the nanoe™ X feature can function independently or concurrently with your air conditioner. This market leading Air Sterilisation technology works towards the inhibition of bacteria, viruses, allergens, pollens and mould within your indoor environment, whilst deodorising, keeping your home or office fresh and clean. Panasonic & Sensitive Choice are committed to bringing you Quality Air, for Life.

THE SEVEN BENEFITS OF









Inhibition of Bacteria & Viruses
nanoe™ X envelops and inhibits the activity of airborne
and adhered Bacteria & Viruses.



Inhibition of Mould growth
Common airborne and adhered mould found inside
living/working spaces are enveloped and inhibited
by nanoe™ X.



Inhibition of major Allergens
In addition to allergens from sources such as dog/cat
dander, mite faeces/carcasses, and airborne mould,
other major allergens are inhibited by nanoe™ X.



Inhibition of Pollen

nanoe™ X is effective in inhibiting a variety of pollens
globally, all year around. The inhibition effect has
been confirmed on a number of common species
found internationally.



Breakdown of Hazardous Substances nanoe™ X has been confirmed to inhibit and breakdown common hazardous/harmful substances found in PM2.5, ensuring that the air you breathe is cleaner and safer.



Hydrates and Moisturises
nanoe™ X combines with natural sebum (natural
skin oils) to coat the skin, leading to a smoother,
well-hydrated complexion.

* The nanoeTMX mode can be run independently from cooling or heating mode, and needs to be on for the 24 hour air purification to function



PURIFIES WHEN YOU'RE AWAY

Characteristics of the control of th

Step 1: Turn ON your air conditioner with Panasonic's Comfort Cloud App

Step 2: Select nanoe™ X mode from 'Mode Selection'. nanoe™ X mode is displayed on screen.

*1 CZ-TACG1 WLAN Adaptor and internet connection required for operation.
*1 Functionality may vary by model



The nanoe™X mode can be turned on independently to cooling or heating mode, thereby cleaning your indoor air, whilst minimising energy usage when you are away from home.

PURIFIES WHEN YOU'RE AT HOME






WALL-MOUNTED : PREMIUM REVERSE CYCLE INVERTER Single - Split Type



CS-Z25VKR | CS-Z35VKR | CS-Z42VKR



CS-Z50VKR | CS-Z60VKR | CS-Z71VKR | CS-Z80VKR



CZ-RD514C Wired Remote Controller (Optional)

CZ-TACG1

Network

Adaptor*1

(Optional)



*Star rating : CS-Z50VKR (Residential)

Cooling (): Outdoor Unit EER: Cooling Efficiency

ALL CAPACITY AND ENERGY EFFICIENCY RATINGS

Running current is at rated conditions (AS3823) and does not include compressor

20°C DB 7°C DB / 6°C WB

ARE BASED ON AS/NZS3823.1.1

Indoor temperature Outdoor temperature

start-up or variations in power supply and load conditions.

COOLING

HEATING

SPECIFICATIONS

MODEL		(240V / 1 Phase / 50Hz)		CS-Z25VKR	CS-Z35VKR	CS-Z42VKR	CS-Z50VKR	CS-Z60VKR	CS-Z71VKR	CS-Z80VKR
				[CU-Z25VKR]	[CU-Z35VKR]	[CU-Z42VKR]	[CU-Z50VKR]	[CU-Z60VKR]	[CU-Z71VKR]	[CU-Z80VKR]
Cooling / Heating Capacity		(min-max)	kW	2.50 [0.90-3.00] 3.20 [0.90-5.00]	3.50 [0.90-4.00] 4.30 [0.90-5.80]	4.20 [0.90-5.00] 5.10 [0.90-7.10]	5.00 [0.95-6.00] 6.00 [1.05-8.00]	6.00 [1.70-7.10] 7.20 [1.70-8.50]	7.10 [1.70-8.10] 8.00 [1.70-9.90]	8.00 [2.30-9.00] 9.00 [2.20-11.00]
		(min-max)	Btu/h	8,530 [3,070-10,200] 10,900 [3,070-17,100]	11,900 [3,070-13,600] 14,700 [3,070-19,800]	14,300 [3,070-17,100] 17,400 [3,070-24,200]	17,100 [3,240-20,500] 20,500 [3,580-27,300]	20,500 [5,800-24,200] 24,600 [5,800-29,000]	24,200 [5,800-27,600] 27,300 [5,800-33,800]	27,300 [7,840-30,700] 30,700 [7,500-37,500]
Air Flow		Indoor	L/s	193/203	207/220	222 <mark>/222</mark>	328/332	332/340	355/362	370/370
Dehumid			L/h	1.5	2.0	2.4	2.8	3.3	4.1	4.7
Electrical Data		Running Current	А	2.30/2.90	3.75/4.40	4.70/5.90	5.10/5.80	7.00/7.80	8.60/9.20	10.90/11.30
		Max Current	А	5.7	7.0	10.7	11.9	13.0	15.0	15.4
		Power Input (min-r	max) kW	0.50 (0.18-0.75) 0.62 (0.17-1.30)	0.80 (0.20-1.06) 0.94 (0.18-1.56)	1.07 (0.22-1.60) 1.34 (0.23-2.25)	1.13 (0.21-2.05) 1.31 (0.23-2.65)	1.58 (0.44-2.20) 1.78 (0.40-2.50)	1.97 (0.44-2.48) 2.11 (0.40-3.00)	2.32 (0.46-2.82) 2.41 (0.50-3.30)
AEER / EER ACOP / COP			W/W W/W	4.87/5.00 5.06/5.16	4.31/4.38 4.51/4.57	3.88/3.93 3.77/3.81	4.38/4.42 4.54/4.58	3.77/3.80 4.02/4.04	3.58/3.60 3.77/3.79	3.43/3.45 3.72/3.73
Star Rating		Hot Climate	Cooling Heating	4.0 3.5	4.0 3.5	3.5 3.0	4.0 4.0	3.5 3.0	3.0 3.0	3.0 3.0
		Average Climate	Cooling Heating	3.5 3.0	3.5 3.0	3.5 2.5	4.0 3.5	3.0 2.5	3.0 2.5	3.0 2.5
		Cold Climate	Cooling Heating	3.5 3.0	3.5 2.5	3.5 2.0	4.0 2.5	3.0 2.0	3.0 1.5	3.0 2.0
TCSPF & HSPF Residential/ Commercial		Hot Climate	TCSPF HSPF	5.90/6.43 5.26/5.22	5.64/6.16 5.14/5.12	5.40/5.89 4.51/4.36	5.89/6.41 5.52/5.30	5.02/5.44 4.66/4.52	4.84/5.23 4.71/4.58	4.75/5.10 4.57/4.51
		Average Climate	TCSPF HSPF	5.26/6.80 4.94/5.03	5.16/6.60 4.63/4.81	5.03/6.39 4.08/4.10	5.50/6.93 5.00/4.97	4.73/5.80 4.17/4.21	4.60/5.68 4.09/4.21	4.55/5.55 4.06/4.20
		Cold Climate	TCSPF HSPF	5.18/7.37 4.55/4.72	5.21/7.27 4.01/4.31	5.16/7.01 3.55/3.75	5.63/7.67 4.29/4.52	4.86/6.36 3.55/3.82	4.74/6.24 3.45/3.63	4.70/6.02 3.54/3.80
	Sound Pressu Level*2dB(A)	re Indoor (H / L / Q-Lo)		43/25/19 42/27/21	44/26/19 46/29/21	47/30/23 46/31/27	47/34/31 45/33/29	47/36/33 47/35/32	49/37/34 49/37/34	51/38/35 50/38/35
Noise Level		Outdoor (H / Q-Lo)		47/- 47/-	49/- 50/-	47/42 <mark>47/42</mark>	48/43 48/43	53/48 53/48	54/49 54/49	55/50 55/50
Noise	Sound Power	Indoor (H/L/Q-Lo)	59/41/35 58/43/37	60/42/35 62/45/37	63/46/39 62/47/43	63/50/47 61/49/45	63/52/49 63/51/48	65/53/50 65/53/50	67/54/51 66/54/51
	Level dB(A)	Outdoo	or (H / Q-Lo)	62/- 62/-	64/- 65/-	62/57 62/57	62/57 62/57	67/62 67/62	68/63 68/63	69/64 69/64
Net	Weight	Indoor (Outdoor)	kg	10(31)	10(31)	10(43)	13[44]	13(50)	13(50)	13(60)
Dimensions		Indoor (H x W x D) Outdoor (H x W x D)	mm mm	295 x 919 x 194 542 x 780 x 289	295 x 919 x 194 542 x 780 x 289	295 x 919 x 194 695 x 875 x 320	302 x 1,120 x 236 695 x 875 x 320	302 x 1,120 x 236 695 x 875 x 320	302 x 1,120 x 236 695 x 875 x320	302 x 1,120 x 236 795 x 875 x 320
Ref	rigerator Pipe	Liquid Side	mm/(inch)	ø 6.35 (1/4)	ø 6.35 (1/4)	ø 6.35 (1/4)	ø 6.35 (1/4)	ø 6.35 (1/4)	ø 6.35 (1/4)	ø 6.35 [1/4]
Dia	meter	Gas Side	mm/(inch)	ø 9.52 (3/8)	ø 9.52 (3/8)	ø 12.70 [1/2]	ø 12.70 [1/2]	ø 12.70 (1/2)	ø 15.88 (5/8)	ø 15.88 (5/8)
Pipe	e Extension Len	gth	min-max (m)	3~20	3~20	3~30	3-30	3~30	3-30	3~30
Max	rimum Elevation	Length	m	15	15	15	15	15	20	20
Pipe	e Length For Ad	ditional Gas	m	7.5	7.5	7.5	10	10	10	10
Add	litional Gas Amo	unt	g/m	10	10	15		15	25	25
Ope	rating Range (0	utdoor) Cooling	Degree °C	+5 ~ +46 -15 ~ +24	+5 ~ +46 -15 ~ +24	+5 ~ +46 -15 ~ +24	+5 - +46 -15 - +24	+5 ~ +46 -15 ~ +24	+5 ~ +46 -15 ~ +24	+5 ~ +46 -15 ~ +24

^{*1} Indoor temperature display and some special function are not available through the App for all models.

SPECIFICATIONS & FEATURES

Products in this brochure contain R32 refrigerant. Please refer to Panasonic's installation instructions and service manuals before installation and servicing this product.

Only persons and/or companies qualified and experienced in the installation, service and repair of refrigerant products should be permitted to do so.

The purchaser must ensure that the person and/or company who is to install, service or repair this air conditioner has qualifications and experience in refrigerant products.

Suitable access for warranty and service is required.

Future improvement, specifications, designs of product and availability are subject to change without notice. Please check with your dealer.

All the specifications except star rating are based on average climate.

FEATURES EXPLANATION

INVERTER CONTROL

Varies the rotation speed of the compressor fo higher energy savings.



ECO MODE

More energy saving compared to the normal mode by automatically adjusting the set temperature by up to 2°C. It's ideal when you want to maintain room temperature for gentle cooling and heating.



Come home to ultra-fast cooling, and then enjoy continuous comfort Shower Cooling that evenly distributes cool air.



QUIET MODE



PERSONAL AIRFLOW CREATION

Vertical and horizontal airflow patterns can be combined as desired to achieve optimum comfort, w operation possible by remote, even from a distance.



MILD DRY COOLING

Fine control helps prevent a rapid decrease in room humidity while maintaning the set temperature.



FAN MODE

Allows you to run the fan without any cooling or heating, thus giving just ventilation.



AUTO CHANGEOVER (INVERTER)

In Auto Mode the unit will select if heating or



POWERFUL MODE

Pressing the Powerful button cools or heats the room quickly. It provides fast comfort, with full power and a strong airflow. This is perfect for use immediately after coming home, or when unexpected guests arrive.



SOFT DRY OPERATION MODE

Starts with cooling to dehumidify, then provides continuous breeze at a low frequency to keep a room dry without much change to the



HOT START CONTROL

On the start of the heating cycle and after the defrost cycle, the indoor fan will start up once the indoor heat exchanger is warm.



CLEAN & HEALTHY AIR

nanneTM X

bacteria and viruses, for a fresh and cleaner living



ODOUR-REMOVING FUNCTION

when the unit starts up. That's because the fan remains off momentarily, while the source of the odour inside the air conditioner is suppressed.

The unit must be in cool or dry mode and the fan speed must be set to automatic.



REMOVABLE WASHABLE PANEL

Gives you easy access to the filter as well making



CONVENIENCE

24-HOUR DUAL ON & OFF REAL SETTING TIMER

DEVICE (DRED)

This feature enables you to preset two different sets of start/stop operation timer (hour and minute) within a 24-hour time frame.



when wired to do so.



WIRED REMOTE CONTROL (OPTIONAL) For use in commercial applications, or where users

3RD PARTY CONNECTIVITY





DEMAND RESPONSE ENABLING

Allows Electrical Utility Companies to regulate the power supply to the units if connected.



(T) 24

LCD WIRELESS REMOTE CONTROL



WIRELESS LAN REMOTE CONTROL FOR INTERNET CONNECTION (OPTIONAL)



RELIABILITY

BLUE FIN CONDENSER



LONG PIPING

Long piping offers more flexible installation options. *20m - CS-Z25VKR, CS-Z35VKR *30m - CS-Z42VKR, CS-Z50VKR, CS-Z60VKR, CS-Z71VKR, CS-Z80VKR



SELF-DIAGNOSTIC FUNCTION Should a malfunction occur, the unit diagnoses the problem and shows the corresponding alphanumeric code. This allows for quicker



RANDOM AUTO RESTART

When multiple units are connected and there is a power outage, they will turn on at different times in order to not spike the power supply.



TOP-PANEL MAINTENANCE ACCESS





OUTDOOR









CU-Z35VKR

CU-Z25VKR



CU-Z80VKR

CU-Z50VKR CU-Z60VKR

CU-Z42VKR CU-Z71VKR

10 11

^{*2} Sound pressure level specification is measured according to JIS C9612. All models have outdoor power supply and use R32 refrigerant. All TCSPF and HSPF are two decimal rounding numbers.